



Model Number 353B34	ACCELEROMETER, ICP®			Revision M ECN #: 26810
Performance	ENGLISH	SI	Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)	
Sensitivity (±5 %)	100 mV/g	10.19 mV/(m/s²)	[2]	
Measurement Range	±50 g pk	±491 m/s² pk	[2]	
Frequency Range (±5 %)	1 to 4000 Hz	1 to 4000 Hz	Output Bias Voltage 4.5 to 7.5 VDC 4.5 to 7.5 VDC	
Frequency Range (±10 %)	0.7 to 7000 Hz	0.7 to 7000 Hz	Excitation Voltage 12 to 30 VDC 12 to 30 VDC	
Frequency Range (±3 dB)	0.35 to 12000 Hz	0.35 to 12000 Hz	Constant Current Excitation 1 to 20 mA 1 to 20 mA	
Resonant Frequency	≥22 kHz	≥22 kHz	Measurement Range ±30 g pk ±294 m/s² pk	
Broadband Resolution (1 to 10000 Hz)	0.0005 g rms	0.005 m/s² rms	[1]	
Non-Linearity	≤1 %	≤1 %	[3]	
Transverse Sensitivity	≤5 %	≤5 %	[4]	
Environmental			J - Ground Isolated	
Overload Limit (Shock)	±10000 g pk	±98100 m/s² pk	Frequency Range (±5 %) 1 to 4000 Hz 1 to 4000 Hz	
Temperature Range (Operating)	-65 to +250 °F	-54 to +121 °C	Frequency Range (±10 %) 0.7 to 6000 Hz 0.7 to 6000 Hz	
Base Strain Sensitivity	0.0002 g/με	0.002 (m/s²)/με	Resonant Frequency ≥18 kHz ≥18 kHz	
Electrical			Electrical Isolation (Base) ≥10⁸ Ohm ≥10⁸ Ohm	
Excitation Voltage	20 to 30 VDC	20 to 30 VDC	Q - Extended discharge time constant [2]	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	Frequency Range (±5 %) 0.1 to 4000 Hz 0.1 to 4000 Hz	
Output Impedance	≤100 Ohm	≤100 Ohm	Frequency Range (±10 %) 0.07 to 7000 Hz 0.07 to 7000 Hz	
Output Bias Voltage	7.5 to 11.5 VDC	7.5 to 11.5 VDC	Discharge Time Constant ≥10 sec ≥10 sec	
Discharge Time Constant	0.5 to 2.0 sec	0.5 to 2.0 sec	Settling Time (within 10% of bias) <120 sec <120 sec	
Settling Time (within 10% of bias)	<25 sec	<25 sec	Supplied Accessory: Model ACS-4 Single-axis, low frequency phase and amplitude response calibration from 0.5 to 10 Hz	
Spectral Noise (1 Hz)	320 μg/√Hz	3139 (μm/sec²)/√Hz	W - Water Resistant Cable	
Spectral Noise (10 Hz)	70 μg/√Hz	687 (μm/sec²)/√Hz	Electrical Connector Sealed Integral Cable Sealed Integral Cable	
Spectral Noise (100 Hz)	18 μg/√Hz	177 (μm/sec²)/√Hz	Electrical Connection Position Top Top	
Spectral Noise (1 kHz)	6.4 μg/√Hz	63 (μm/sec²)/√Hz	Notes	
Physical			[1] Typical.	
Size (Height)	1.26 in	32.0 mm	[2] B and Q options supplied with a sensitivity tolerance of ± 10 %.	
Weight	0.96 oz	27 gm	[3] Zero-based, least-squares, straight line method.	
Sensing Element	Quartz	Quartz	[4] Transverse sensitivity is typically ≤ 3%.	
Size (Hex)	0.75 in	19.1 mm	[5] See PCB Declaration of Conformance PS023 for details.	
Sensing Geometry	Shear	Shear	Supplied Accessories	
Housing Material	Titanium	Titanium	080A109 Petro Wax (1)	
Sealing	Welded Hermetic	Welded Hermetic	080A12 Adhesive Mounting Base (1)	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	081B05 Mounting Stud (10-32 to 10-32) (1)	
Electrical Connection Position	Top	Top	ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)	
Mounting Thread	10-32 Female	10-32 Female	M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)	
<div><div>CE [5]</div><div><p>Typical Sensitivity Deviation vs Temperature</p></div></div>				
All specifications are at room temperature unless otherwise specified.				
In the interest of constant product improvement, we reserve the right to change specifications without notice.				
ICP® is a registered trademark of PCB group, Inc.				
Entered: BLS		Engineer: BAM	Sales: WDC	Approved: BLS
Date: 07/10/2007		Date: 07/02/2007	Date: 07/02/2007	Date: 07/13/2007
		Spec Number: 353-2340-80		
			3425 Walden Avenue Depew, NY 14043 UNITED STATES Phone: 800-828-8840 Fax: 716-684-0987 E-mail: info@pcb.com Web site: www.pcb.com	

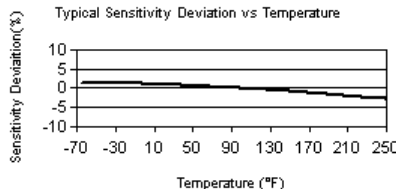